



Approval Marks



Certified

EN 61347-1
EN 61347-2-13

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		198	230	264	Vac
Input Frequency		47		63	Hz
Output Power		0		60	W
Input Current			330m		mA
Output Voltage			12		V
Output Current	25°C, Nominal Input	0		5	A
Power Factor(Full Load)	High Power Factor		0.95		
Line Regulation		-2		2	%
Load Regulation	25°C, Nominal Input	-2		2	%
Output Voltage Accuracy	25°C, Nominal Input	-2		2	%
Protection	Overload Protection				
	Short Circuit Protection(Auto-Restart)				
	Over Heat Protection				
Ambient Temp.		-20		+50	°C


Lamp Type Normal LED

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

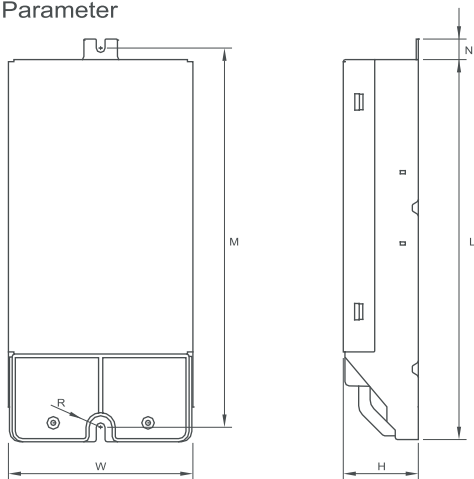

L : 180 mm H : 35.5 mm
M : 179.8 mm K :
N : 9.8 mm R : 2.1 mm
W : 88 mm Slot On One Side Allowing Alignment : M+/-3 mm

- Terminal Block : Screw Type Terminal
- Housing Material : Metal, No Sharp Edges
- Soldering : Lead-Free, Comply With RoHS
- Label : Surface Print

Wiring Diagram

