

230V AC



Approval Marks



Certified

EN 61047:2004
EN 61347-1:2008
EN 61347-2-2:2001

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range	230-240VAC -8%...+6%	211	230-240	254	Vac
Input Frequency		50	-	60	Hz
Output Power	Wire Length<2M	50	-	150	W
Input Current	25 °C,Nominal Input 230VAC	-	650	-	mA
Output Voltage	Full Load	-	11.5~	-	Vac
Output Frequency	Approx.	-	34K	-	Hz
Output Current	25 °C,Nominal Input 230VAC	-	-	12.5	A
Dimming	Phase-Cut-Off Dimmer				
Power Factor(Full Load)	Full Load	-	0.98	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Thermal Shut-Down Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+85	°C


Lamp Type Halogen 50~150W

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

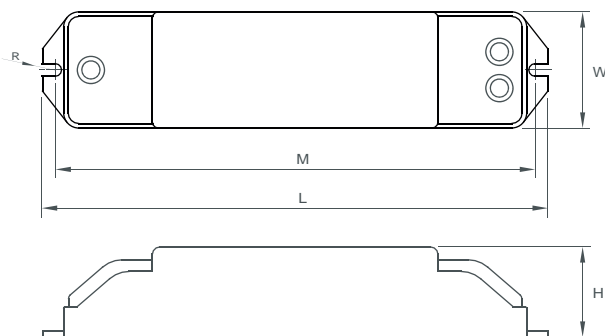

- L : 167 mm H : 29.3 mm
- M : 158.6 mm K :
- N :
- W : 38.4 mm R : 2.1 mm
- Slot On One Side Allowing Alignment : M+/-3 mm
- Tolerance : $\geq 0 \sim 100 \geq +/-.5\text{mm}$
- $100 \geq +/-.1 \text{ mm}$
- Terminal Block : Screws Terminal
- Housing Material : Polycarbonate
- Soldering : Lead-Free, Comply With RoHS
- Label : Surface Print

Wiring Diagram

